



**Podvěsný kontejner**  
XB35-3TG

- LED světlo
- Perfopanel
- Lamino deska
- Výškově stavitelné nožičky

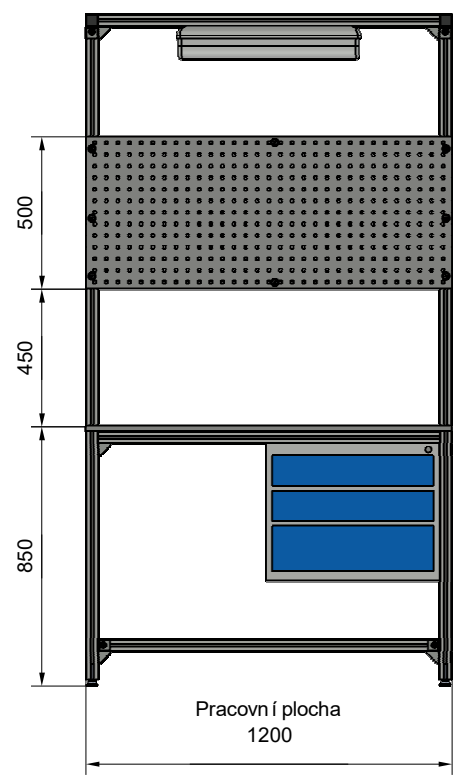

Pracovní plocha  
1200

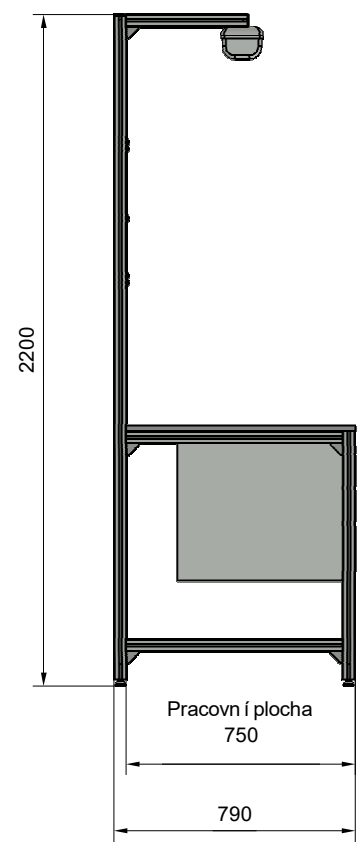

Pracovní plocha  
750

790

2200

|   |  |    |        |                        |   |
|---|--|----|--------|------------------------|---|
| Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v |  |    |        |                        |   |
| -Machining details and finish classification to DIN ISO 1302  |  |    |        |                        |   |
| E   | Total load capacity*:<br>(Celková nosnost:*) |    | 500 kg |                        | Load capacity - floor*:<br>(nosnost na patro:*) |
|   | Scale  | A3 |        | Drawn<br>Kempný        | Checked   |
|   |  |    |        | Dat. <b>18.06.2024</b> |   |
| Title   |  |    |        | Sheet 1 of 1           |   |
| Title <b>Enprag</b>   |  |    |        | Rev. A00               |   |
| Title <b>Dílenský stůl s podvěsným kontejnerem</b>  |  |    |        | Doc.Nr <b>24061433</b> |   |

This document is the sole property of Enprag s.r.o. and may not be copied, duplicated, used or given to third parties without the written permission from Enprag s.r.o. Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:  
- DIN ISO 2768-2-K  
Tolerancing:  
- DIN 7167

